


角度 规格	单肢 (t)	双肢 (t)		三肢 (t)		四肢 (t)		环形 (t)	链条每米单重 (kg/m)
	0°	0~45°	> 45~60°	0~45°	> 45~60°	0~45°	> 45~60°	0°	
	1	1.4	1	2.1	1.5	2.1	1.5	1.6	
φ 6mm	1.12	1.57	1.12	2.35	1.68	2.35	1.68	1.79	0.80
φ 8mm	2.00	2.80	2.00	4.20	3.00	4.20	3.00	3.20	1.40
φ 10mm	3.15	4.41	3.15	6.62	4.73	6.62	4.73	5.04	2.20
φ 13mm	5.30	7.42	5.30	11.13	7.95	11.13	7.95	8.48	3.80
φ 16mm	8.00	11.20	8.00	16.80	12.00	16.80	12.00	12.80	5.70
φ 18mm	10.00	14.00	10.00	21.00	15.00	21.00	15.00	16.00	7.30
φ 20mm	12.50	17.50	12.50	26.25	18.75	26.25	18.75	20.00	9.00
φ 22mm	15.00	21.00	15.00	31.50	22.50	31.50	22.50	24.00	10.90
φ 26mm	21.20	29.68	21.20	44.52	31.80	44.52	31.80	33.92	15.20
φ 32mm	31.50	44.10	31.50	66.15	47.25	66.15	47.25	50.40	23.00

安全系数: 4:1

执行标准: GB/T25853-2010

EXAMPLE OF CHAIN SLINGS

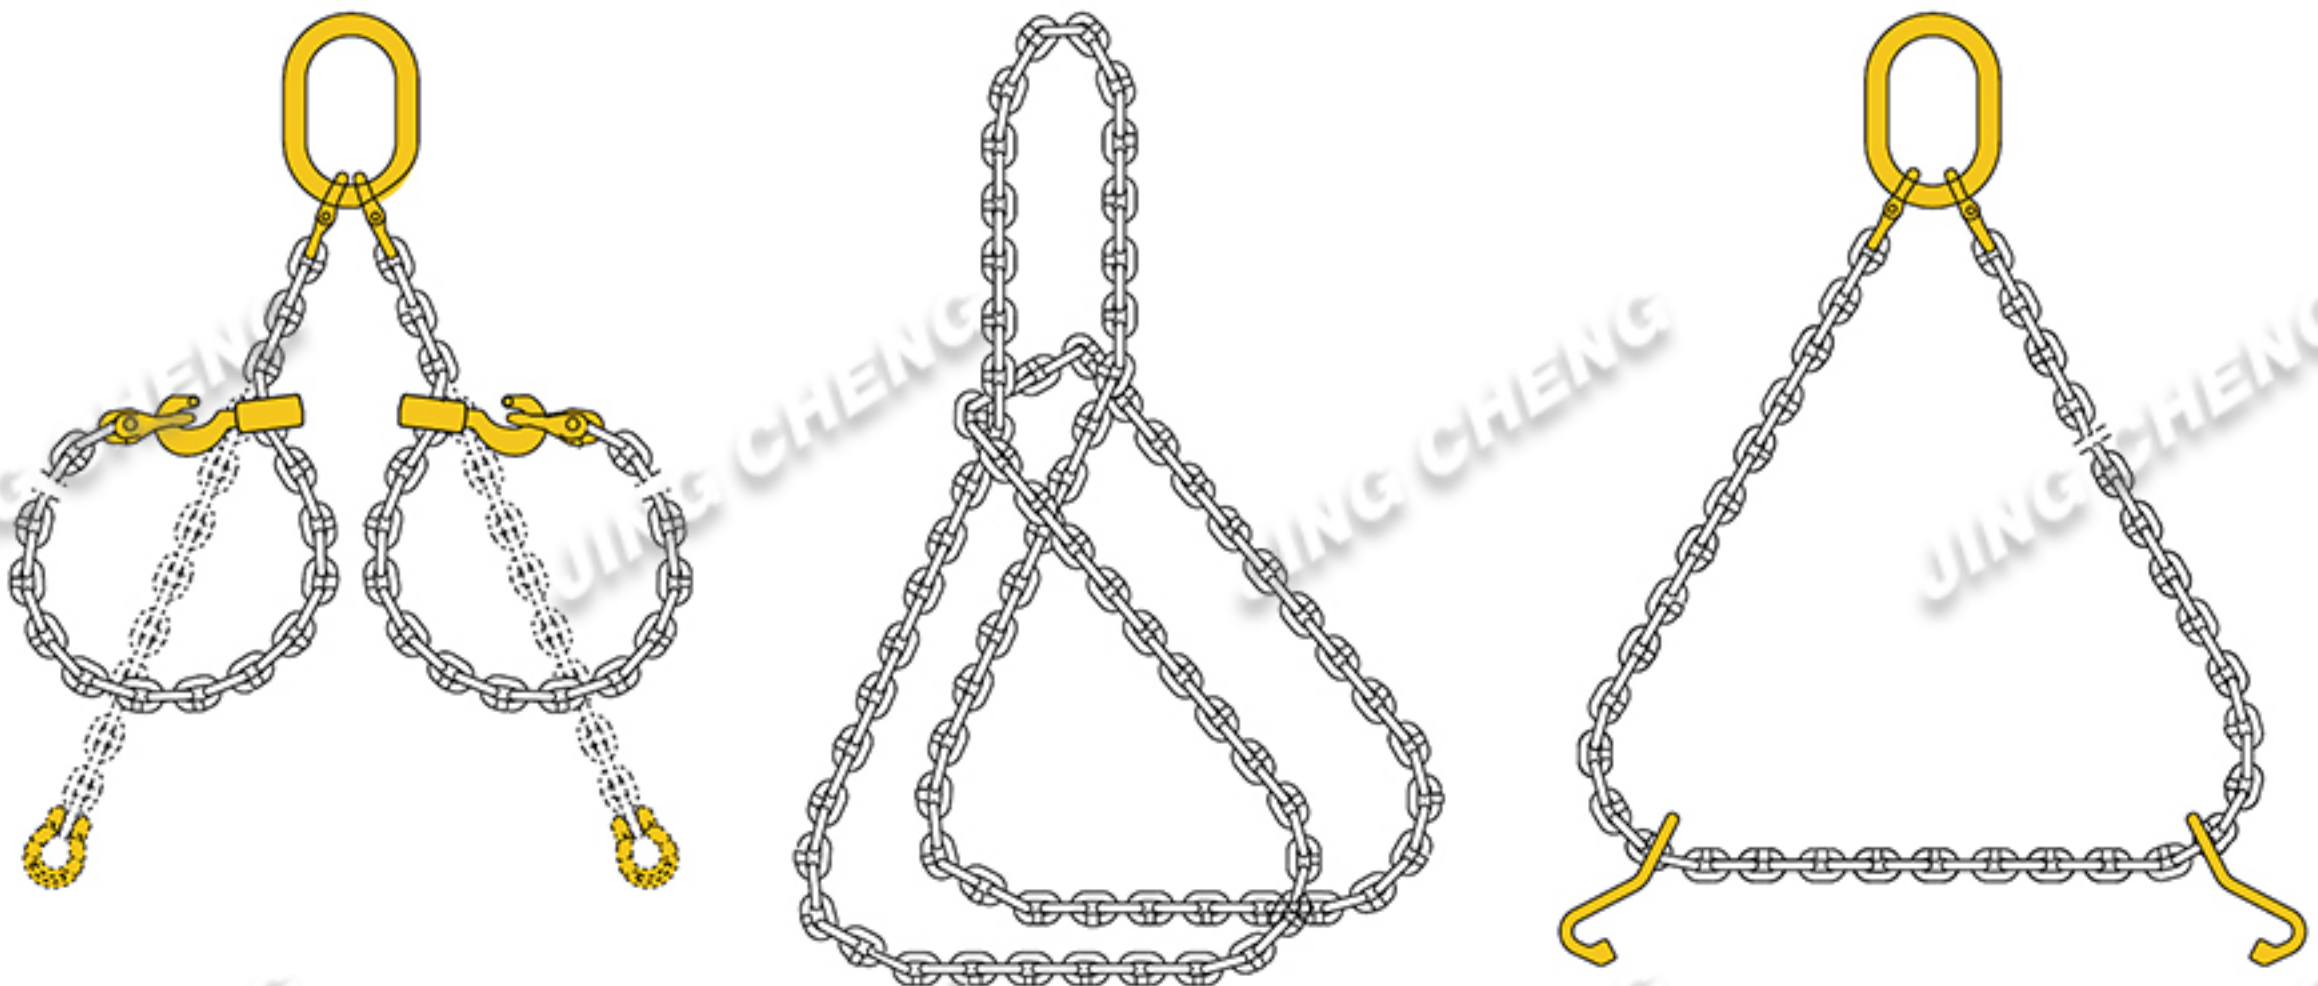

EXAMPLE OF WIRE ROPE SLING & WEB SLING

